


Be Safe. Be Strong. Be Competitive.

*Let This Be Your Next Rig...
You and Your Clients Deserve the Best.*

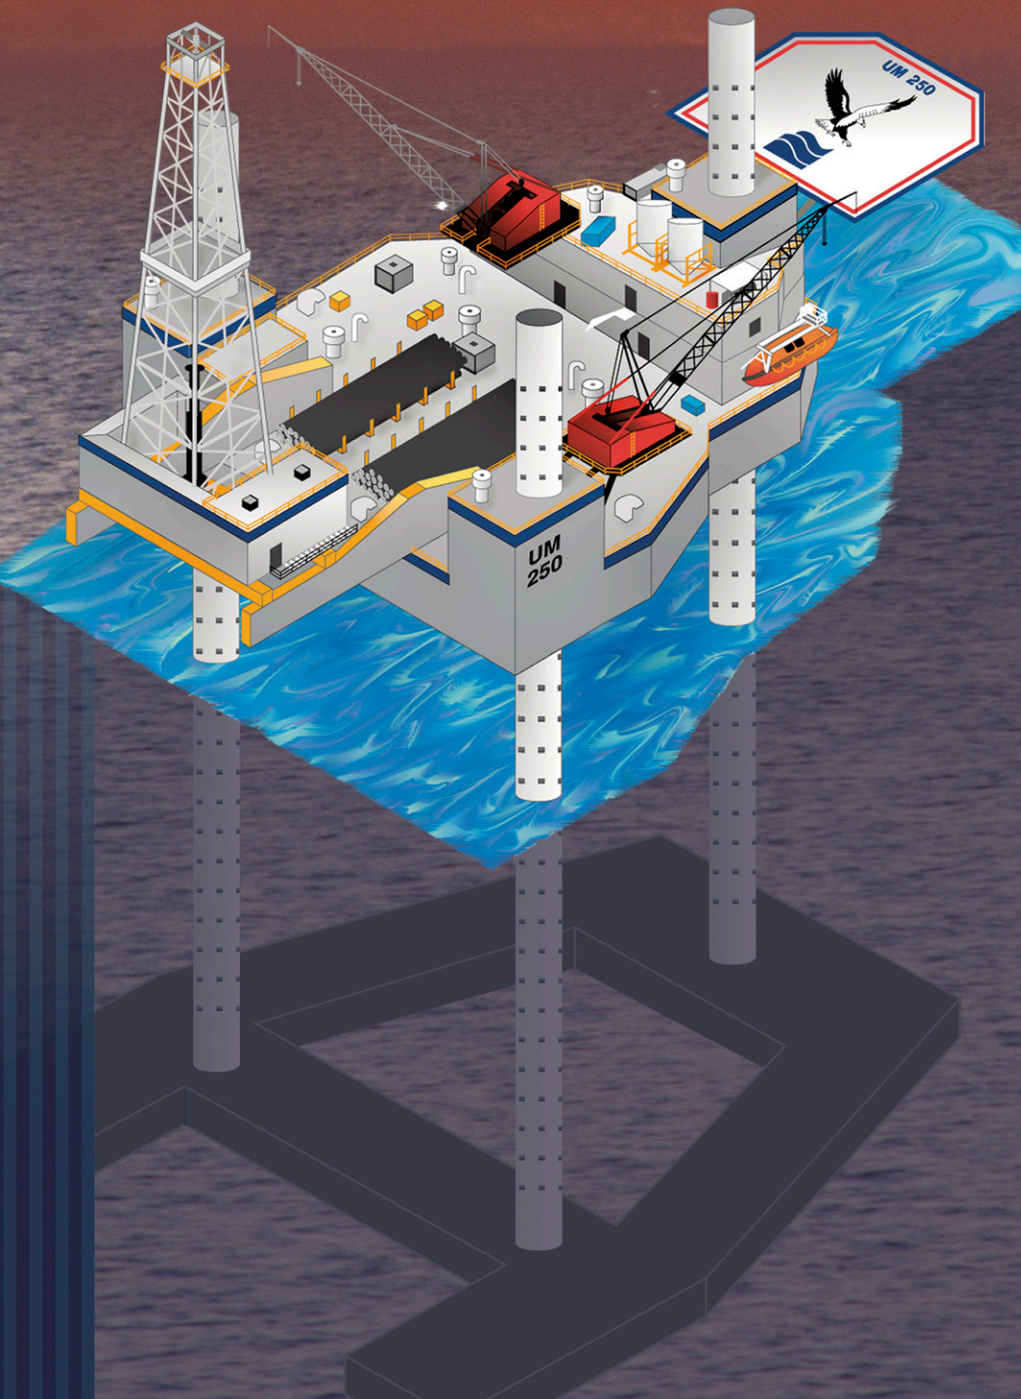

with the **UM 250**

United Marine offers a mat-supported, self-elevating mobile offshore drilling unit with cantilevered skid unit - the **UM 250**.

This proven design is capable of operating in water depths up to 250 feet and in a wide range of bottom conditions. The UM 250 eliminates the need for time consuming pre-loading procedures going on location or leg pulling delays getting off location.

The UM 250 incorporates upgrades and larger drilling variable load capacities for today's requirements into a basic design proven with four decades of service.

Nominal Dimensions

Platform, ft	166 x 145 x 20
Mat, ft	236 x 205 x 11
Columns:	
Number & Type	3 cylindrical
Size, each	13 ft OD x 321 ft

Nominal Capacities

Drilling Water	6,150 bbl
Fuel Oil	2,200 bbl
Potable Water	1,100 bbl
Liquid Mud	1,500 bbl
Bulk Mud & Cement	6,800 cu ft
Bag Storage	3,600 sacks
Pipe Racks	1,200,000 lb
Quarters	57 men
Max. Variable Load	2,250 tons
Max. Moving Variable Load	1,850 tons

Operating Conditions

Still Water Depth, ft	225	250
Max. Wave Height, ft	60	33
Wave Period, sec	15	10
Design Wind Velocity, knots	100	70
Minimum Air Gap, ft	44	25



409-833-7070

Texaco Island, Port Arthur, Texas
mail@unitedmarineshipyard.com
www.unitedmarineshipyard.com